


THREE SCREW PUMPS


SN Series

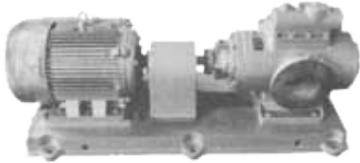

SN series are horizontal or vertical, flange mounted pumps depending on the liquid pumped. Heated double casing designs are also available.

Capacity: 0.9m³/h Pressure: 0-40 bar
Viscosity: 0-760cst Temperature: ≤250 Deg C


SNHG Series

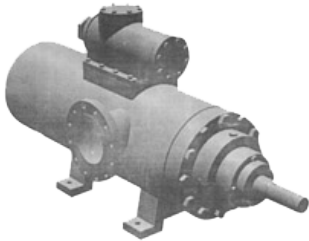

SNHG series three screw pump are mainly used to transfer lubricating oil, heavy oil, dredge oil, printing ink, light diesel fuel, heavy diesel fuel etc.

Capacity: 50-320 m³/h Pressure: 0-45 bar
Viscosity: 0-760cst Temperature: ≤150 Deg C

SPF Series

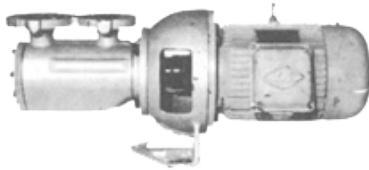

The SPF series horizontal pump, it is used to transfer fuel oil and to pump lubricating and hydraulic oils.

Capacity: 0.4-6.7 m³/h Pressure: 0-40 bar
Viscosity: 0-760cst Temperature: ≤150 Deg C

3G (3GC,3GR) Series



The 3G(3GC,3GR) series pumps are suitable for pumping various lubricant oils.

Capacity: 0-600 m³/h Pressure: 0-25 bar
Viscosity: 0-760cst Temperature: ≤150 Deg C



Head Office:
6120 Davies Road
Edmonton, AB
T6E 4M9

Phone: (780) 485-2010 • Toll Free: (866) 707-7867
Fax: (780) 485-1938
• Calgary • Drayton Valley • Lethbridge
www.rotatingright.com