

ROTATING RIGHT

WEATHERFORD




Weatherford®
Industrial Pumps

2200

Triplex Plunger Pump

Specifications:

Stroke Length: mm (in.)	125 (5)
Rated power at 400 RPM: kw (hp)	149 (200)
Rated Plunger Load: kg (lbs.)	5329 (11750)
Maximum discharge working pressure: MPa (psi)	
"L" Series	14 (1971)
"M" Series	33 (4769)
"H" Series	79 (11483)
Oil Capacity: liters (gallons)	
Crankcase	30 (8)
Weight: kg (lbs.)	
Pump only	2041 (4500)
Optional Accessories:	
Packing lubrication	
Positive crankcase lubrication	
Non-emission liner	

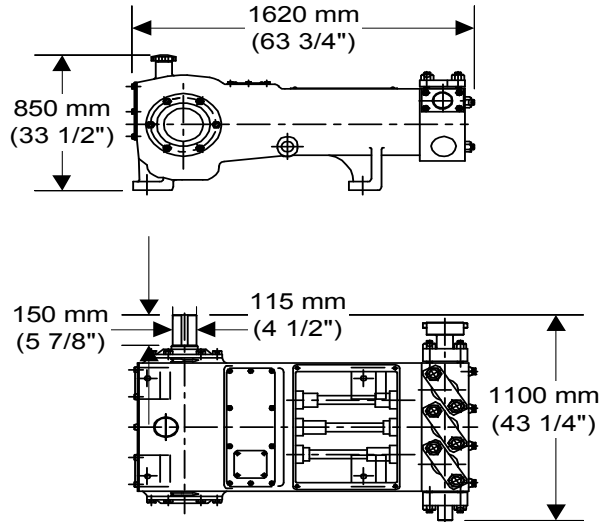

NOTE: Dimensional information provided as a reference only.
Please consult factory for certified drawings.


	Plgr. Dia.		Max Pres.		150 RPM		200 RPM		250 RPM		300 RPM		350 RPM*		400 RPM*			
	mm	in	LPR	GPR	MPa	PSI	LPM	GPM	LPM	GPM	LPM	GPM	LPM	GPM	LPM	GPM		
2200-L	100	3.937	2.945	0.778	6.7	966	442	117	589	156	736	195	884	233	1031	272	1178	311
	90	3.543	2.386	0.630	8.2	1192	358	95	477	126	596	158	716	189	835	221	954	252
	85	3.346	2.128	0.562	9.2	1337	319	84	426	112	532	141	638	169	745	197	851	225
	75	2.953	1.657	0.438	12	1717	249	66	331	88	414	109	497	131	580	153	663	175
	70	2.756	1.443	0.381	14	1971	216	57	289	76	361	95	433	114	505	133	577	152
2200-M	65	2.559	1.244	0.329	16	2286	187	49	249	66	311	82	373	99	436	115	498	131
	60	2.362	1.060	0.280	18	2683	159	42	212	56	265	70	318	84	371	98	424	112
	55	2.165	0.891	0.235	22	3192	134	35	178	47	223	59	267	71	312	82	356	94
	50	1.969	0.736	0.195	27	3863	110	29	147	39	184	49	221	58	258	68	295	78
	45	1.772	0.596	0.158	33	4769	89	24	119	32	149	39	179	47	209	55	239	63
2200-H	42	1.654	0.520	0.137	38	5475	78	21	104	27	130	34	156	41	182	48	208	55
	38	1.496	0.425	0.112	46	6688	64	17	85	22	106	28	128	34	149	39	170	45
	35	1.378	0.361	0.095	54	7883	54	14	72	19	90	24	108	29	126	33	144	38
	32	1.260	0.302	0.080	65	9431	45	12	60	16	75	20	90	24	106	28	121	32
	29	1.142	0.248	0.065	79	11483	37	10	50	13	62	16	74	20	87	23	99	26

Specifications:

Stroke Length: in. (mm)	5 (125)
Rated power at 400 RPM: hp (kw)	200 (149)
Rated Plunger Load: lbs. (Kg)	11750 (5329)
Maximum discharge working pressure: psi (bar)	
"L" Series	1978 (136)
"M" Series	4885 (337)
"H" Series	11821 (815)
Oil Capacity: gallons (liters)	
Crankcase	8 (30)
Weight: lbs. (kg)	
Pump only	4500 (2041)

Optional Accessories:

- Packing lubrication
- Positive crankcase lubrication
- Non-emission liner

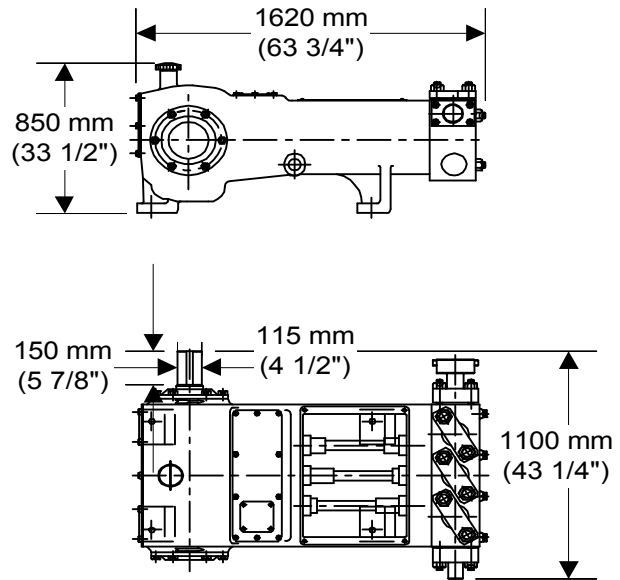

NOTE: Dimensional information provided as a reference only.
Please consult factory for certified drawings.

* Flows are based on 100% volumetric efficiency.
Positive crankcase lubrication is required on speeds less than 150 RPM.
Consult factory for continuous service speeds in excess of 450 RPM.

	Plgr. Dia. (in.)	Plgr. Area (in ²)	BPD per GPR	Max Pres. psi	150 RPM		200 RPM		250 RPM		300 RPM		350 RPM		400 RPM		
					GPM	BPD	GPM	BPD	GPM	BPD	GPM	BPD	GPM	BPD	GPM	BPD	
2200-L	4	12.57	0.803	27.53	935	120	4129	161	5506	201	6882	241	8259	281	9635	321	11012
	3 1/2	9.621	0.615	21.08	1221	92	3162	123	4215	154	5269	184	6323	215	7377	246	8431
	3 3/8	8.946	0.572	19.60	1313	86	2940	114	3920	143	4900	171	5880	200	6860	229	7839
	3	7.069	0.452	15.49	1662	68	2323	90	3097	113	3871	135	4646	158	5420	181	6194
	2 3/4	5.940	0.380	13.01	1978	57	1952	76	2602	95	3253	114	3904	133	4554	152	5205
2200-M	2 1/2	4.909	0.314	10.75	2394	47	1613	63	2151	78	2688	94	3226	110	3764	125	4301
	2 3/8	4.430	0.283	9.71	2652	42	1456	57	1941	71	2426	85	2912	99	3397	113	3882
	2 1/8	3.547	0.227	7.77	3313	34	1165	45	1554	57	1942	68	2331	79	2719	91	3108
	2	3.142	0.201	6.88	3740	30	1032	40	1376	50	1721	60	2065	70	2409	80	2753
	1 3/4	2.405	0.154	5.27	4885	23	790	31	1054	38	1317	46	1581	54	1844	61	2108
2200-H	1 5/8	2.074	0.133	4.54	5666	20	682	27	909	33	1136	40	1363	46	1590	53	1817
	1 1/2	1.767	0.113	3.87	6649	17	581	23	774	28	968	34	1161	40	1355	45	1549
	1 3/8	1.485	0.095	3.25	7913	14	488	19	651	24	813	28	976	33	1139	38	1301
	1 1/4	1.227	0.078	2.69	9575	12	403	16	538	20	672	24	807	27	941	31	1075
	1 1/8	0.994	0.064	2.18	11821	10	327	13	436	16	544	19	653	22	762	25	871



Head Office:
6120 Davies Road
Edmonton, AB
T6E 4M9

Phone: (780) 485-2010 • Toll Free: (866) 707-7867
Fax: (780) 485-1938
• Calgary • Drayton Valley • Lethbridge
www.rotatingright.com